


## 1/16-27 NPT Universal Transmission Test Port Extender

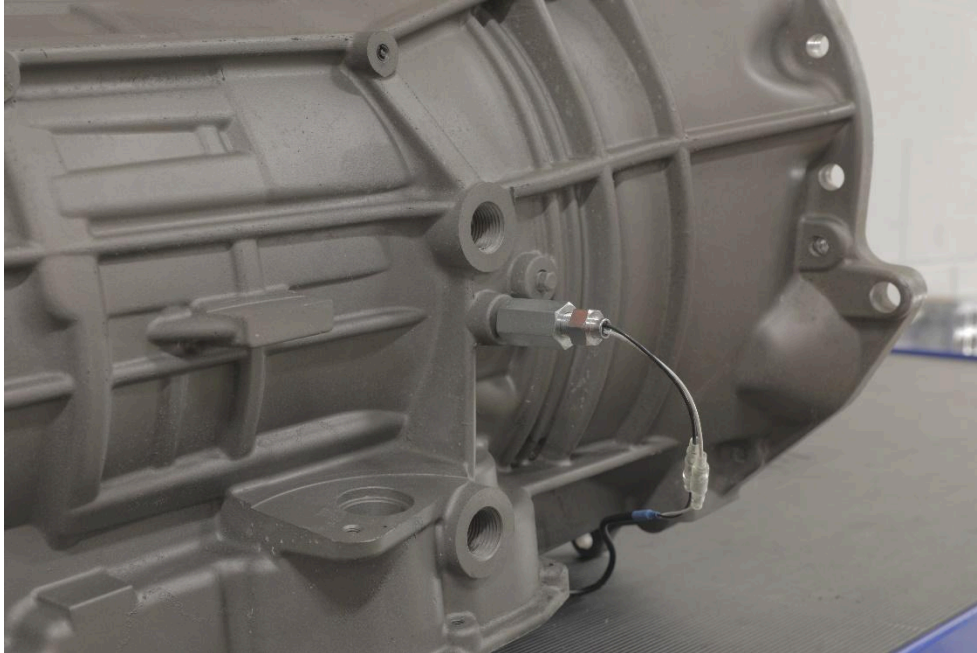

1. Using Teflon tape, wrap the 1/8-27 NPT temperature sensor thread to prevent any transmission fluid leaks.
  - Be sure to wrap the Teflon tape clockwise around the thread.
2. Using Teflon tape, wrap the male end of the 1/16-27 NPT test port extender to prevent any transmission fluid leaks.
3. Thread the 1/8-27 NPT temperature sensor into the female end of the test port extender and tighten with 14mm and 17mm wrenches.
4. Remove the 1/16 NPT bolt that plugs into the transmission test port.
  - Have a drain pan available for any fluid that may leak out of the port.
5. Thread the test port extender with the sensor installed into the transmission test port.
6. Tighten both the test port extender and sensor with a 17mm wrench.
7. After the test port extender and temperature sensor are installed, top off the transmission fluid to manufacturer specifications and check for leaks.

All GlowShift Products are subject to the GlowShift Limited Warranty. Please visit <https://www.glowshiftdirect.com/warranty-policies> to review complete Warranty, Terms, and Conditions.