


Exhaust Gas Temperature (EGT) Bracket for Version 2 Probes

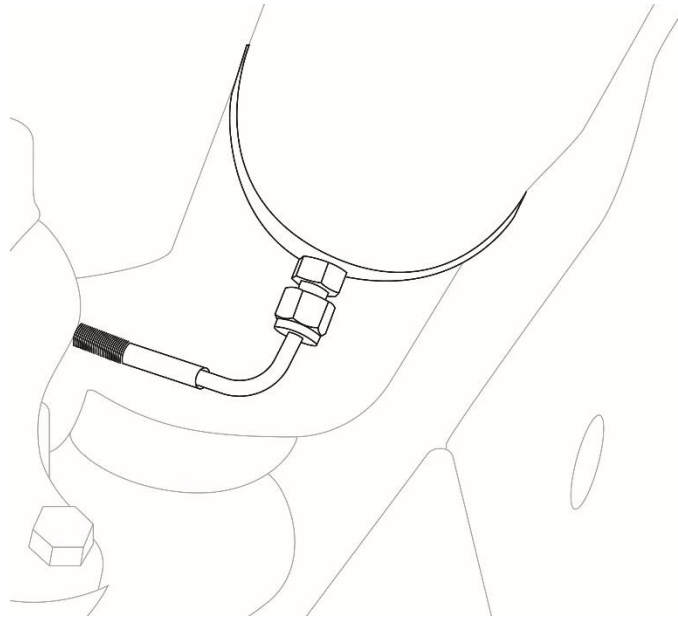

Warning: Installing the Exhaust Gas Temperature (EGT) probe using the Exhaust Gas Temperature Bracket may result in a below-optimum temperature. To avoid this cooling effect, install the EGT Probe before the turbo in the exhaust manifold. The Bracket will fit any application with an exhaust pipe diameter with a minimum of 2 1/2" and a maximum of 5".

1. Locate the exhaust downpipe and choose a mounting point to secure the Bracket.
2. Once the location has been determined, using a 3/8" drill bit, drill a hole into the exhaust pipe. The Bracket has a tapered end that will sit in the 3/8" hole, creating a tight seal.
3. Install the Bracket over the exhaust pipe and tighten using a flathead screwdriver.
4. Remove the 1/8-27 NPT thread adapter from the EGT Probe and insert into the Bracket. Adjust the probe so that the tip is as close to the center of the pipe as possible.

Note: Ensure that the brass ferrule stays on the EGT Probe before you insert it into the Bracket.

5. Thread the EGT Probe into the m12x1.25 male threads on the Bracket and tighten using a 14mm wrench.

Note: GlowShift recommends adding silver anti-seize lubricant to the male threads of the EGT Probe.

6. Once the EGT Probe has been installed, use wire ties to secure the probe wiring.
7. Start the vehicle and ensure there are no leaks around the Bracket and/or the EGT Probe.