


GM Duramax Oil Filter Sandwich Adapter - GS-AF7



This AF7 Oil Filter Sandwich Adapter is designed for spin on oil filters with a max gasket outer diameter of 4 inches and a minimum inner diameter of 3 inches.

1. (Optional) Raise the vehicle using a jack and support it using jack stands.
2. Remove your vehicle's oil filter and make sure there is enough clearance for the oil filter sandwich adapter.
3. Install your gauge's temperature or pressure sensors to one of the 1/8-27 NPT ports located on the adapter. Install all necessary oil feed lines, sensors or any other port plugs at this time using Teflon tape on all the threads to ensure no leaks will occur.
4. Install your GlowShift Oil Filter Sandwich Adapter to the threads where your oil filter is usually mounted lubricating the O-ring with oil.
 - **Note:** Do not over tighten the sandwich adapter. If the sandwich adapter is over tightened the gasket that seals it could tear and result in oil leaks. It should be a little more than hand tight, similar to an oil filter.
5. Install a new oil filter to the threads on the sandwich plate adapter, be sure to lubricate the O-ring with oil.
6. Once your sandwich adapter is installed with your sensors attached, finish installing the rest of your gauge as per the included instructions.
7. Start the engine and check the sandwich adapter and oil filter for any leaks.

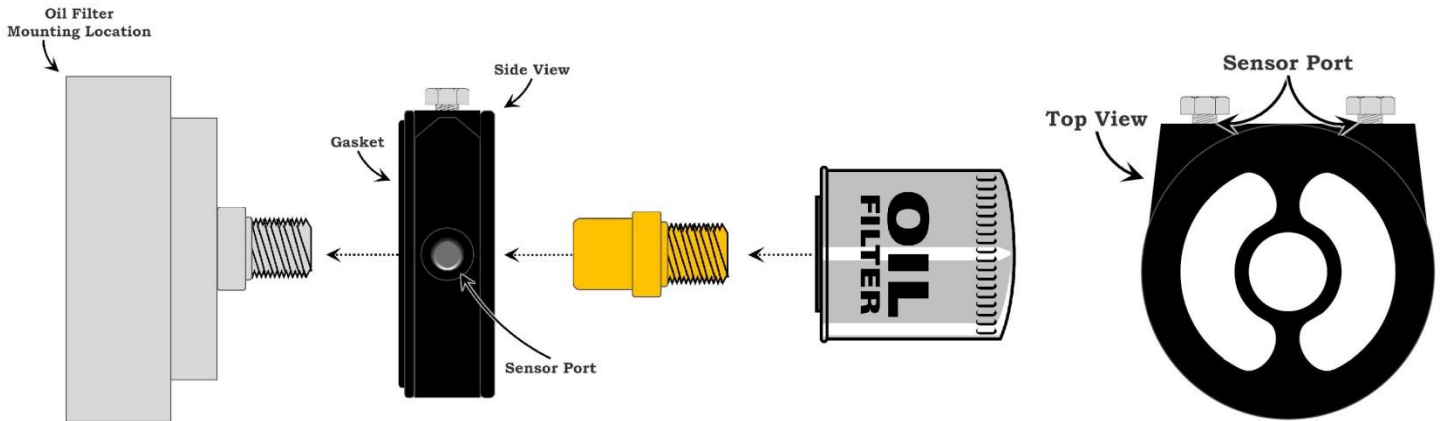